
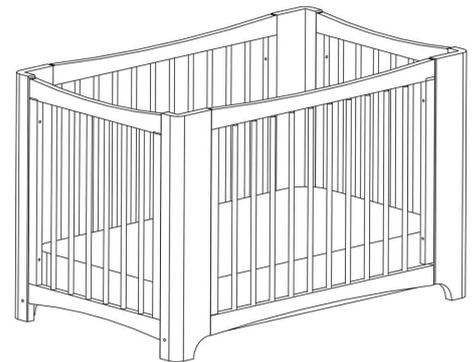
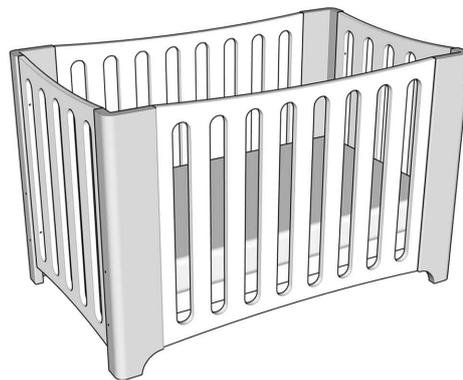


Vogue , Roma Cot


Assembly and care instructions

This cot can be assembled in a number of configurations.
Instructions for all configurations are included in this manual.

Cot

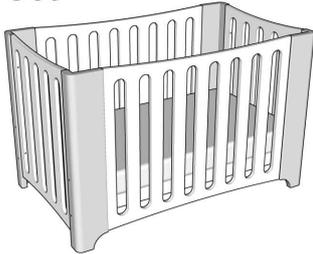

Bassinet

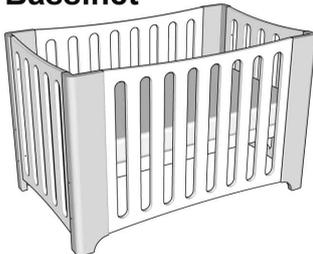


Vogue cot

Roma cot


Mattress and accessories not included

Chaise lounge

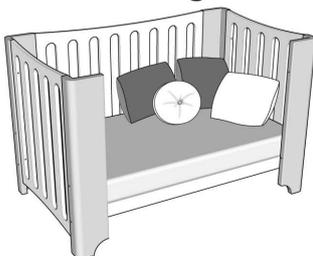


Single Bed - Optional Kit

Optional single bed rails, end panel extensions and base kit purchased separately

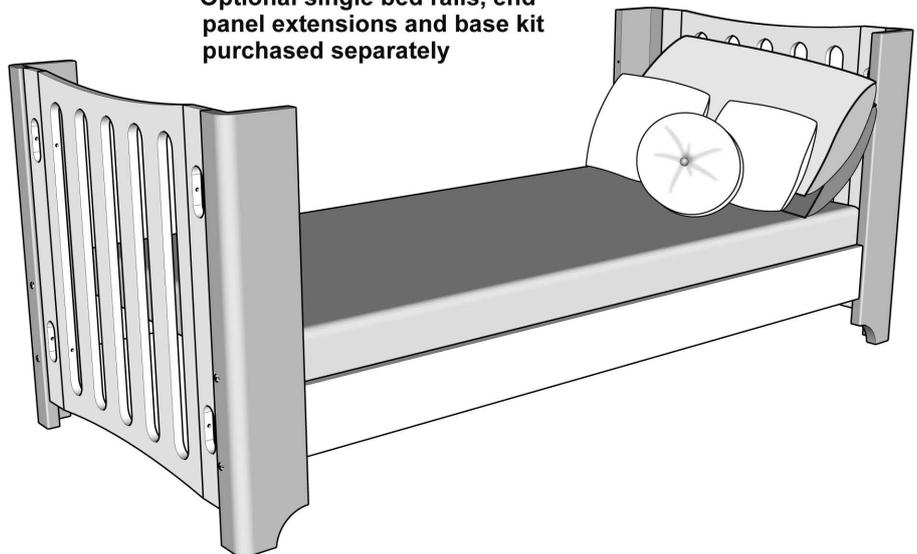

Junior Bed

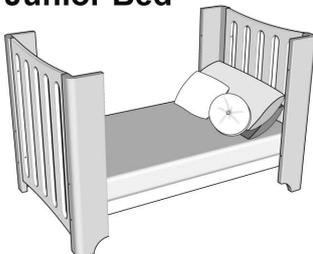

Packaging and instructions printed on recycled materials

Save these instructions for future reference. Due to the heavy nature of the cot, it is recommended assembly is undertaken by two people.

SJC brands

SJC Brands Pty Ltd abn. 58 106 988 578

4 Merryvale Road, MINTO, NSW 2566 p.o. box 5878 MINTO DC, NSW 2566

t. 02 9603 5000 f. 02 9603 7000 e. customer.service@sjcbrands.com.au w. www.tasmaneco.com.au

Warnings

Safety Consideration for your Child.

- Follow the manufacturer's assembly instructions in detail to ensure the safety features of the cot are not compromised.
- ENSURE THE COT IS NOT PLACED TOO CLOSE TO HEATERS, BLINDS, CURTAINS, WINDOWS OR POWER POINTS.
- DO NOT HANG ANYTHING NEARBY WHERE THERE IS A POTENTIAL DANGER OF THE ITEM FALLING INTO THE COT.
- KEEP ANY MEDICATION, STRING, ELASTIC, SMALL TOYS OR SMALL ITEMS SUCH AS MONEY OUT OF REACH FROM ANY POSITION IN THE COT. It is advisable to keep all items out of your child's cot to prevent suffocation or strangulation.
- TO PREVENT FALLS, THE BASE OF THE COT SHOULD BE ADJUSTED TO THE LOWEST POSITION BEFORE YOUR CHILD CAN SIT UP.

Recommended Mattress Size.

- This cot has been manufactured for use with a mattress which measures 750 mm (wide) x 1310 mm (long) x 120 mm (maximum thickness). The width and length are specified because it is IMPORTANT that the gaps between the mattress and the sides and ends of the cot do not exceed 40 mm when the mattress is pushed to one side or end, and 20mm when the mattress is centred in the cot. The thickness of the mattress has been specified to ensure that the depth of cot is greater than 500 mm with the mattress base in the lower position to minimise the risk of a child climbing or falling out of the cot.



Safety Consideration for Cot.

- Re-tighten all connector bolts (at least two months after assembling the cot), as some may loosen as the cot settles. Regularly check all of the connecting bolts, making sure they are tight.
- Regularly check cot for weakness in timber joints and timber panels. If any weaknesses are found, report immediately to Tasman Eco via: www.tasmaneco.com.au
- Do not use cot if it has been damaged in any way and always use genuine Tasman Eco parts. Contact your nearest Tasman Eco stockist or original place of purchase for spare parts
- Report any fault with this furniture to Tasman Eco immediately. See website for details.

Care & cleaning tips


For general dusting / cleaning - periodically wipe the cot over with a dry soft cloth. To remove day to day spills or dirt, wipe down with a soft cloth and mild solution of warm soapy water. Avoid scourers and steel wool as these will damage the finish. Always dry the cot after cleaning.

Assembly tips - hardware


Wooden dowel pins




Gently push or tap dowel pins into place using your thumb or a small hammer. Note, excessive force may result in damage to the pin or furniture.

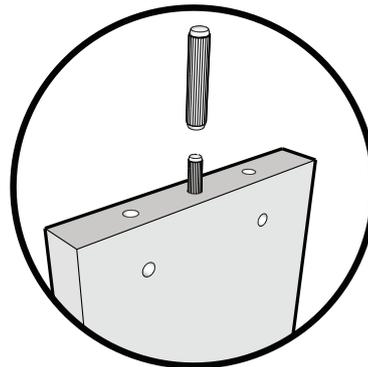

Connector screws and lunar washers

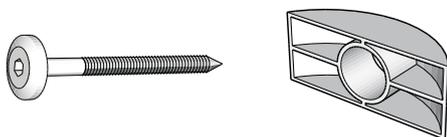

Insert the lunar washer into the locating hole, with the curved face against the wall of the locating hole. Insert the connector screw into the washer and push it through until it engages with the thread of the insert on the panel you are attaching it to. Tighten the connector screw firmly but do not overtighten.

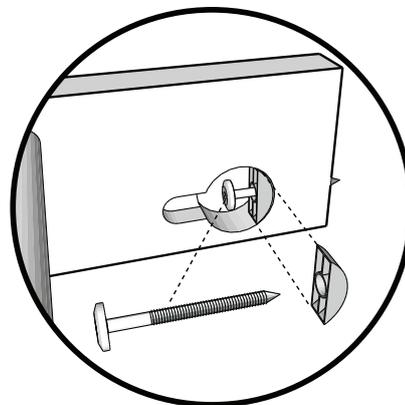

Screws




We recommend tightening all screws and connectors by hand. If using a cordless driver, set the speed to a slow setting and the clutch to a low setting to prevent excessive tightening that may result in damage to your furniture.

Recheck tightness


Re-tighten all connector screws (at least two months after assembling the cot), as some connectors may loosen as the cot settles. Periodically check all of the connector screws, making sure they are tight.

What you will need


Side panels x 2

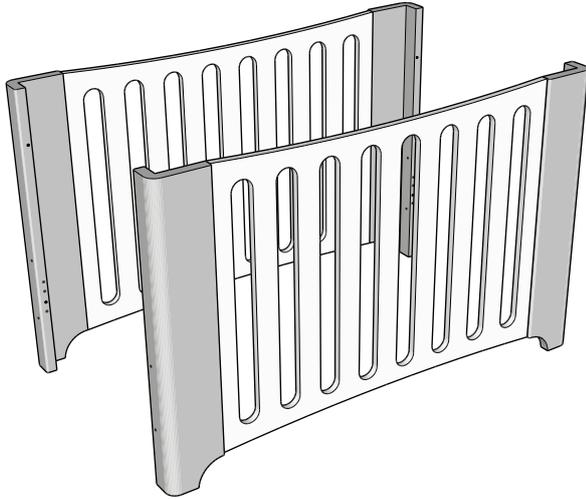

End panels x 2

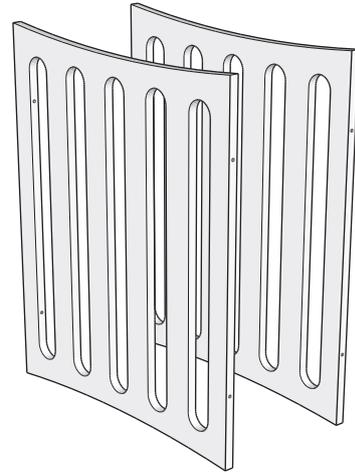


Base x 1

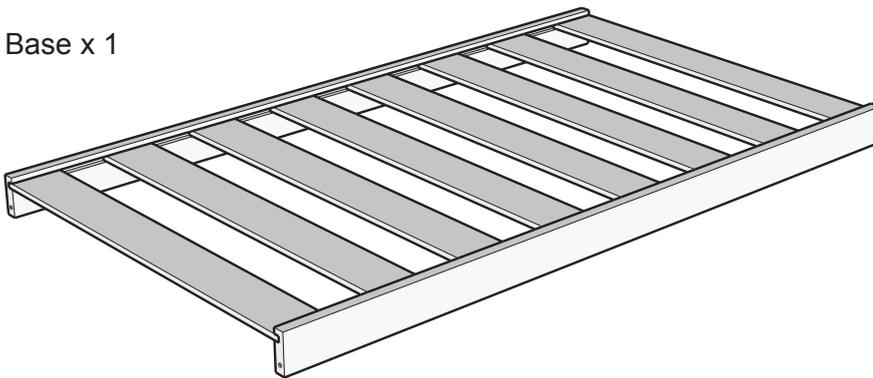


Allen key x 1

Phillips style key may also be needed for the metal cross dowel

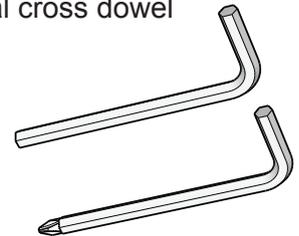

Double ended cap screws x 8

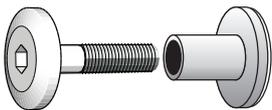

70mm connector screws x12
(Roma cot is 60mm)



Metal cross dowels x 4




Warning


Small parts can present a choking hazard. Always keep small parts out of reach of children both during and after assembly. Store any spare or unused parts in a safe place.

Single bed kit (optional)


Lattice bed bases x 2

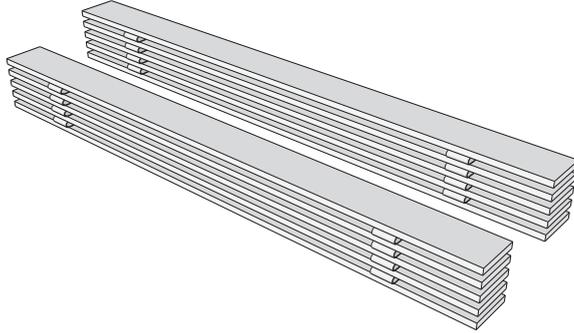

Bed rails x 2

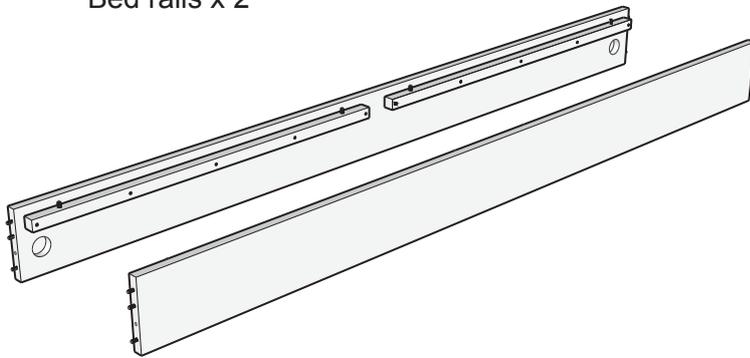

Extension panels x 4

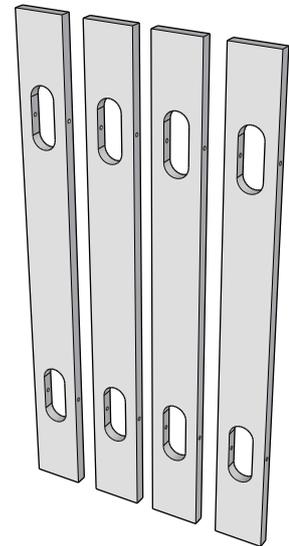


Cap screws x 8




35mm connector screws x 12



Lunar washers x 4



15mm screws x 4



70mm connector screws plus end caps x 8
(Roma cot is 60mm)



Step 1 - Attach the base to one of the side panels

Hardware needed

2 x 70mm connector screws



2 x metal cross dowels




Attach the base to one of the side panels. Note the base position needed for either 'cot' or 'bassinet'.


Secure the base and side panel at each end with the connector screws and metal cross dowels.

Lightly hand tighten each connector screw.

Do not fully tighten the screws just yet.

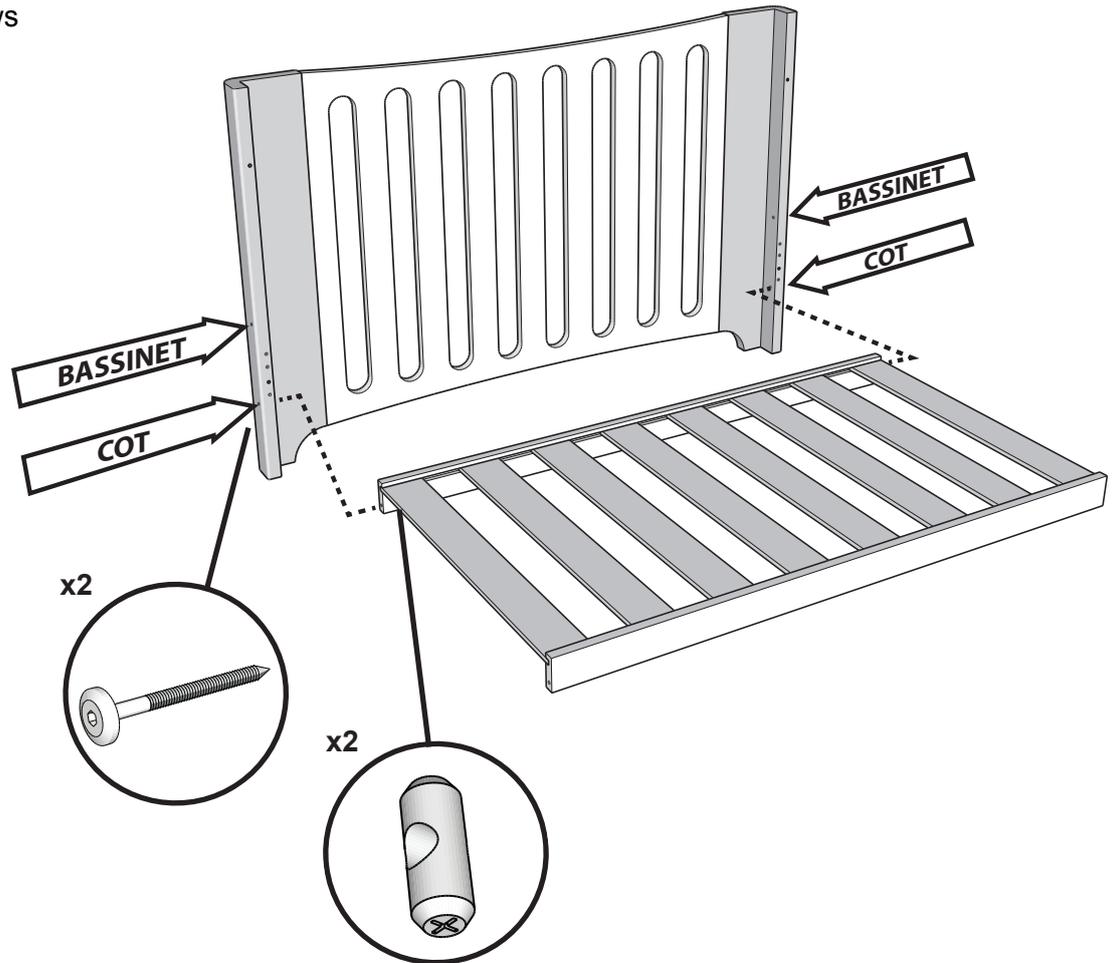

Hint: For this step, hold the metal cross dowel in place while you insert the connector screw. Twist the cross dowel around so that the hole in the cross dowel lines up with the screw.

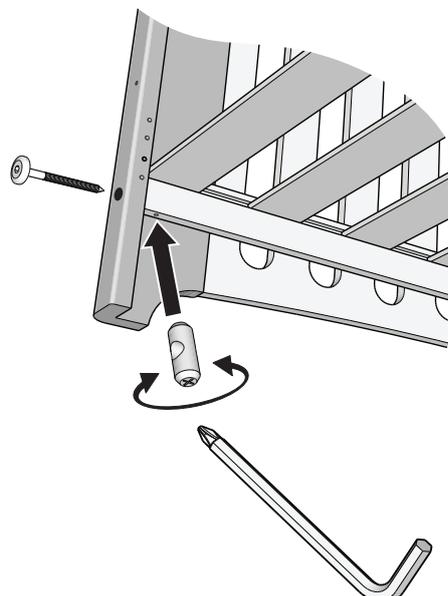

Step 2 - Attach the other side panel

Hardware needed

2 x 70mm connector screws




2 x metal cross dowels



Attach the remaining side panel to the base. Again, note the base position needed for either 'cot' or 'bassinet'. Choose the same set of locating holes as the other side panel.

Secure the base at each end with the connector screws and metal cross dowels as before. Lightly hand tighten each connector screw.

Do not fully tighten the screws just yet.

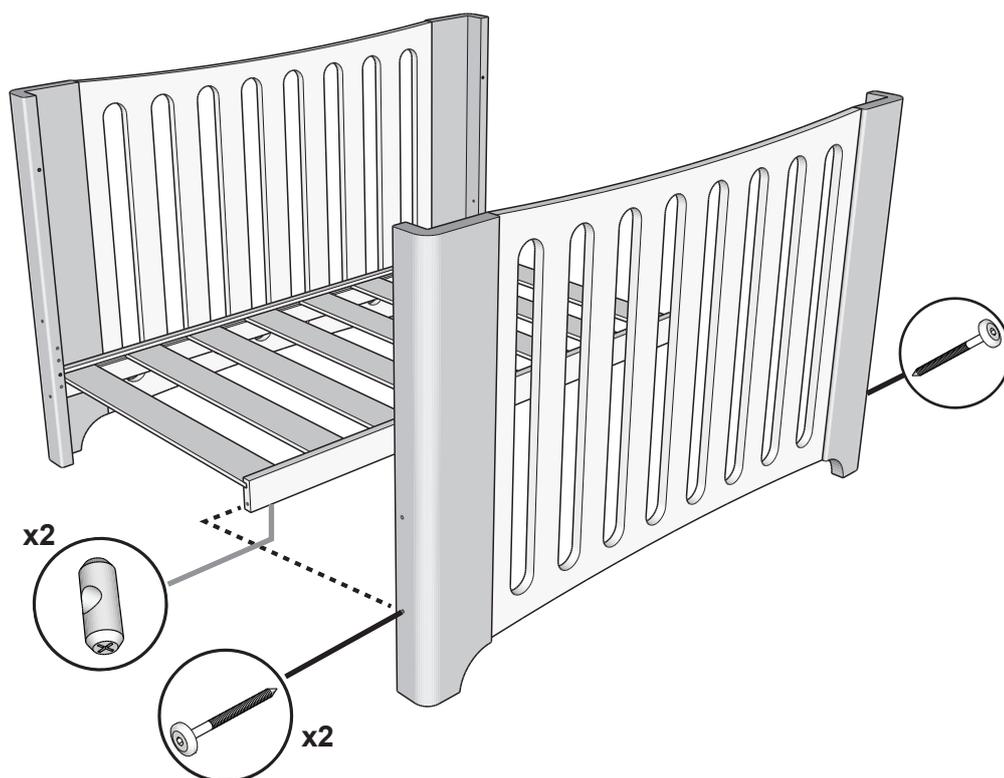

Step 3 - Plug the unused holes

Hardware needed


4 x double ended cap screws



IMPORTANT SAFETY STEP

Fit the double ended cap screws to the 4 remaining unused base locating holes on the side panels. (2 on each side)

This is a required safety step to prevent the entry of small fingers into these holes.

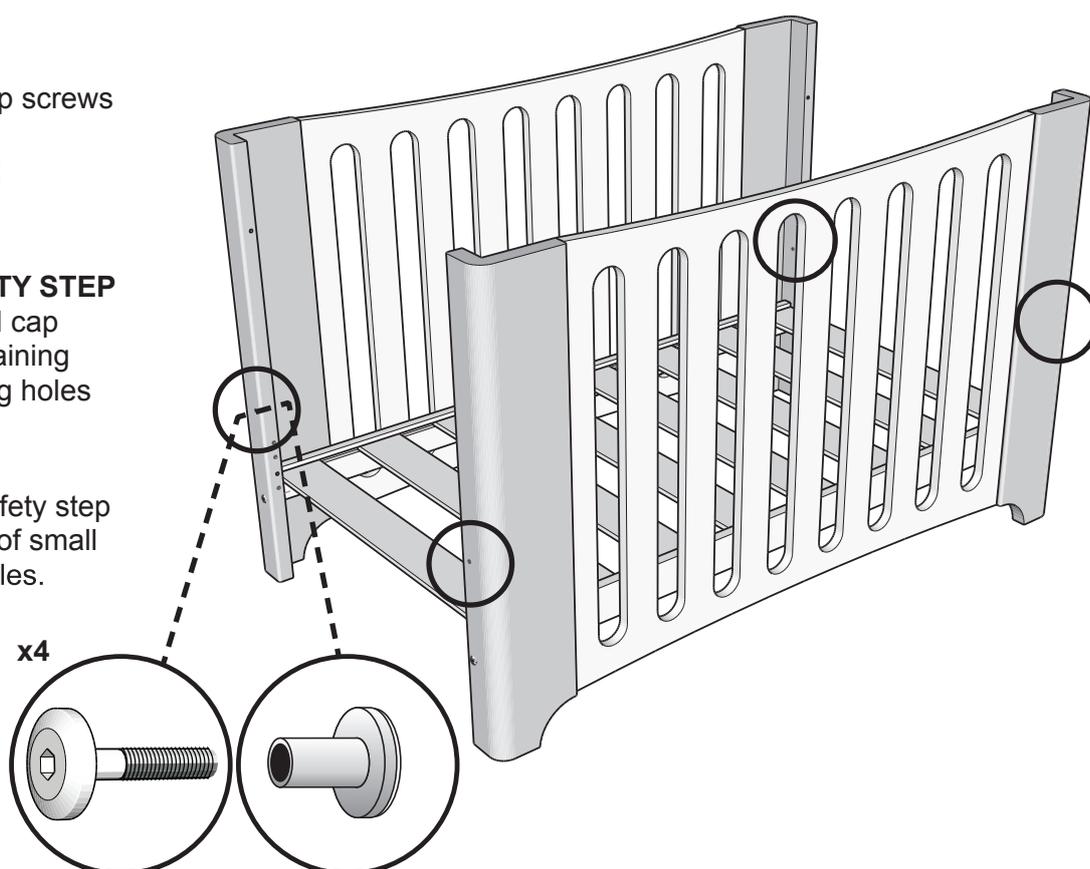

Step 4 - Attach the end panels

Hardware needed



8 x 70mm connector screws



Lightly loosen the connector screws on the base and sides to allow the sides to be gently spread apart.

Position the end panels between the corner posts at each end of the cot.



Insert the connector screws to each end panel. Lightly hand tighten the top 2 connector screws first, and then complete the assembly by lightly hand tightening the bottom connector screws.

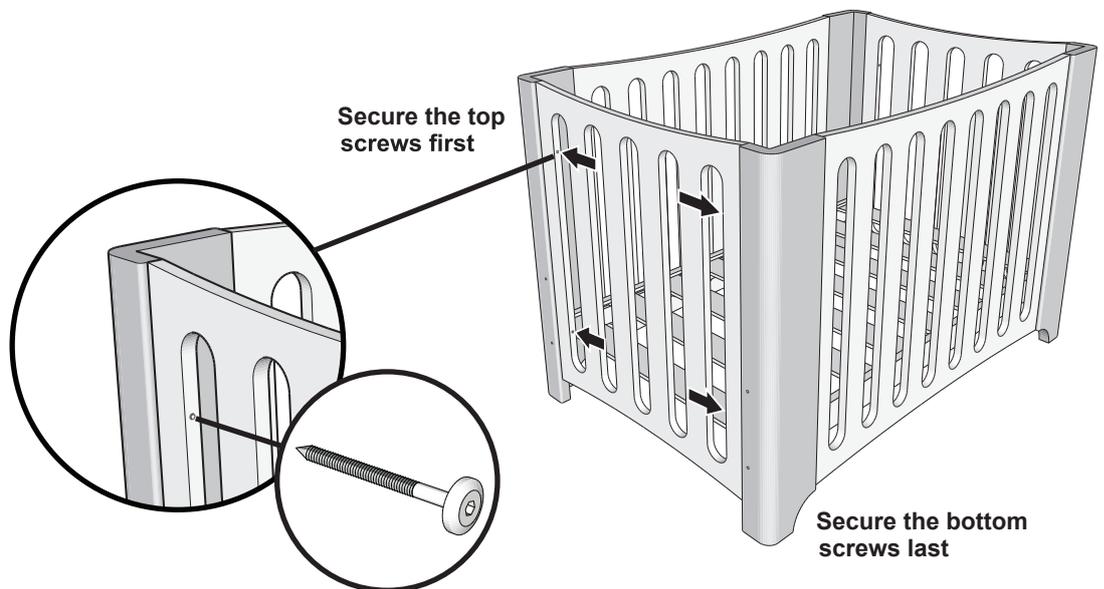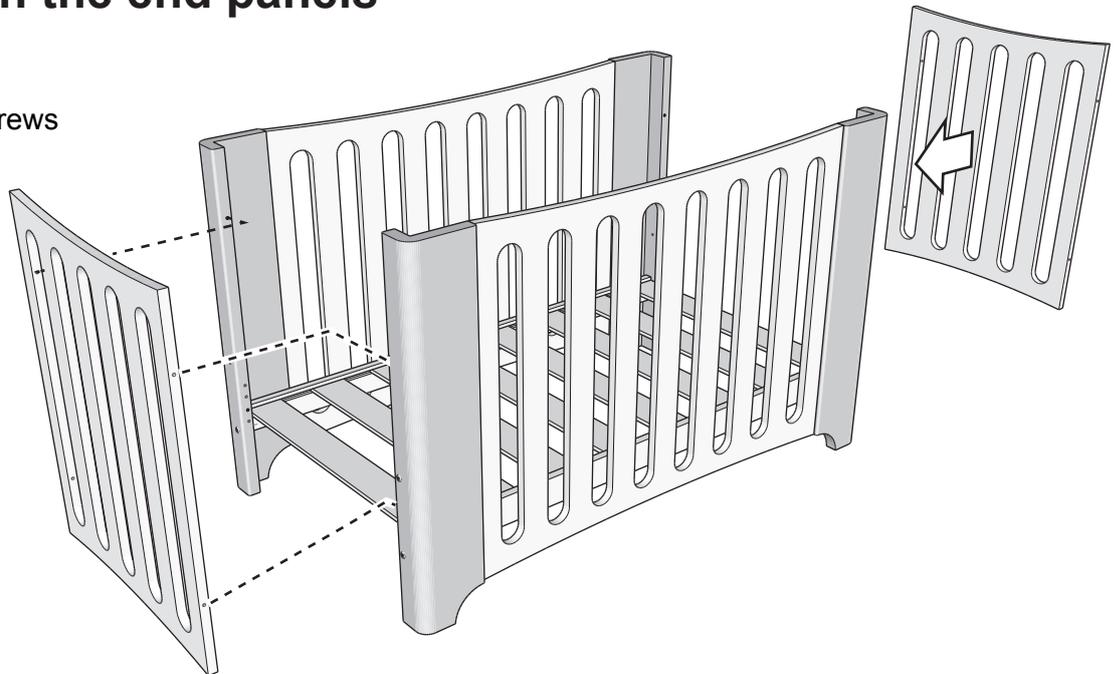

Step 5 - Tighten all connector screws


To complete assembly, tighten all connector screws around the cot.

Tighten the screws firmly but do not overtighten.

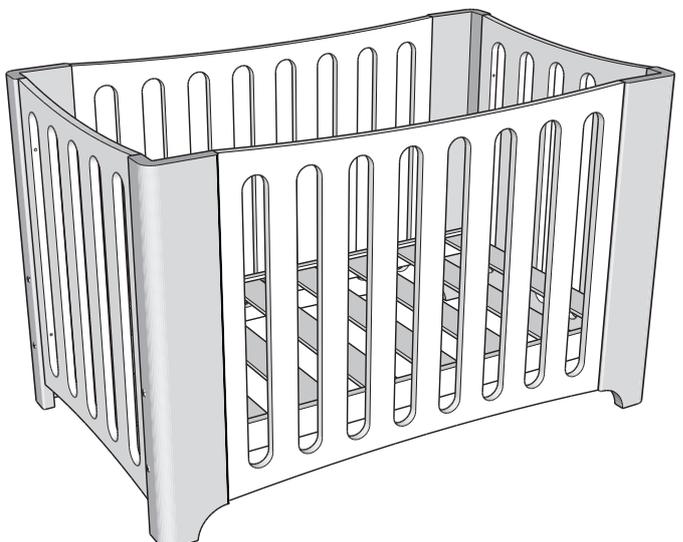

Assembly is now complete

Vogue/Roma Bassinet Assembly

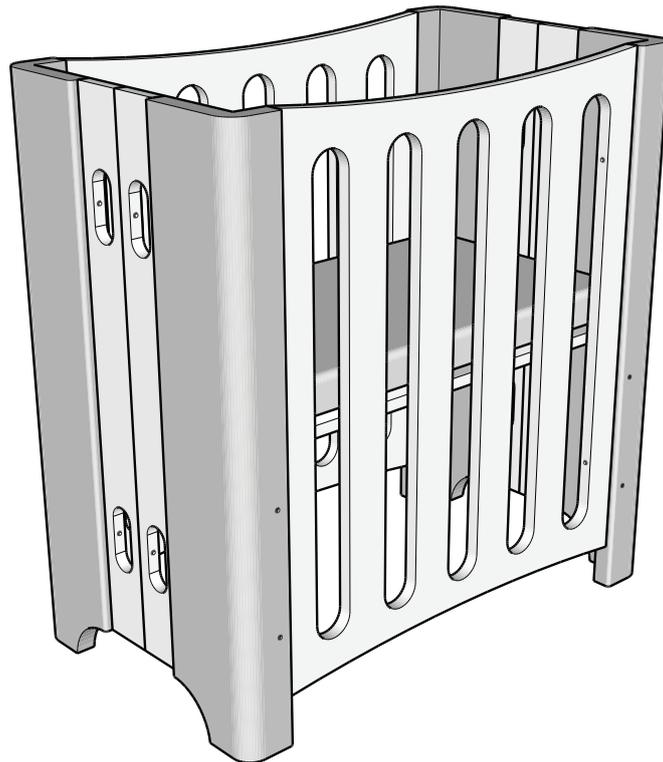

SJC Brands Pty Ltd abn.58 106 988 578

4 Merryvale Road, Minto, NSW 2566

p.o. box 5878 Minto DC, NSW 2566

t. 02 9603 5000 f. 02 9603 7000

customer.service@sjcbrands.com.au


w. www.tasmaneco.com.au

SJC brands


What you will need

Optional baby bassinet kit only

Bassinet base x 1

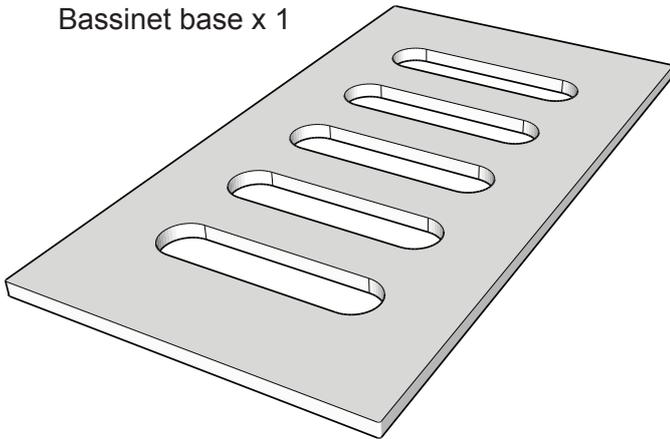

End panels x 4

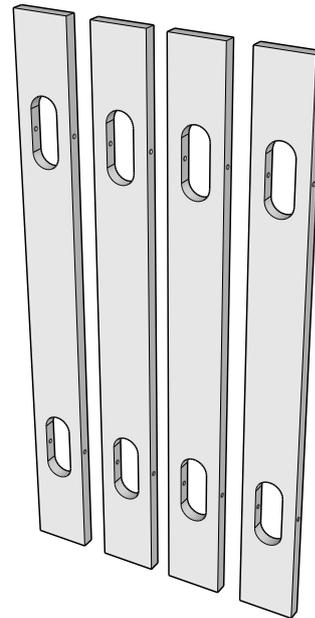


70mm connector screws x 8
(Roma cot is 60mm)



35mm connector screws x 12




Cap screws x 4



Screws x 4



Locating brackets x 4

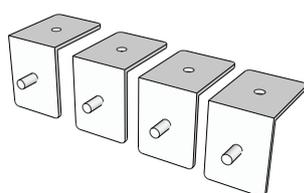

Double ended cap screws x 8



Warning

Small parts can present a choking hazard. Always keep small parts out of reach of children both during and after assembly. Store any spare or unused parts in a safe place.

Assembly tips for hardware

We recommend tightening all screws and connectors by hand. If using a cordless driver, set the speed to a slow setting and the clutch to a low setting to prevent excessive tightening that may result in damage to your furniture.

Screws



Recheck tightness

Re-tighten all connector screws (at least two months after assembling the cot), as some connectors may loosen as the cot settles. Periodically check all of the connector screws, making sure they are tight.

Step 1 - Attach the corner posts and side panels

Hardware needed


8 x 70mm screws



Attach the corner posts to the side panels. Note how each corner post is facing.

Secure the panels to the corner posts with the 60mm connector screws (4 each side) and lightly hand tighten each connector screw.

Do not fully tighten the screws just yet.

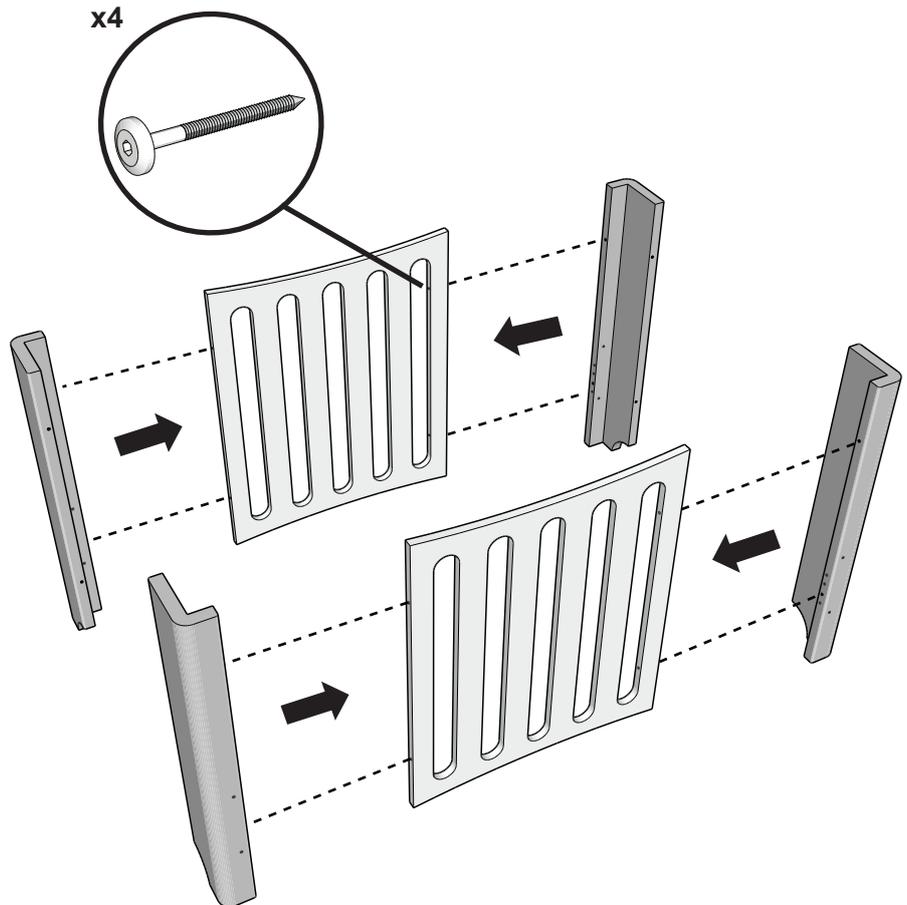


Step 2 - Prepare the end panels

Hardware needed

4 x 35mm connector screws




4 x end cap screws



Attach the end panels in pairs.

Secure each pair of the end panels using the 35mm connector screws and end caps.

Tighten the screws firmly but do not overtighten.

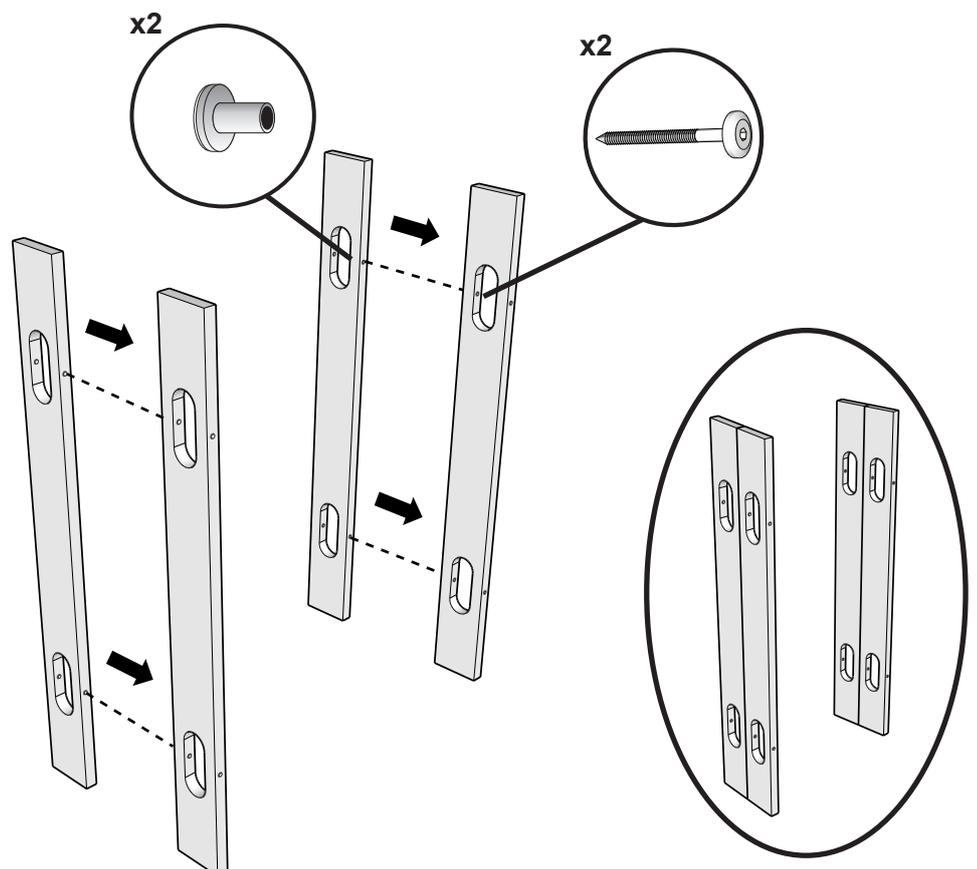

Step 3 - Attach the end panels


Hardware needed

8 x 35mm connector screws



Attach the end panels to the sides using the 35mm connector screws and lightly hand tighten each connector screw.

Do not fully tighten the screws just yet.

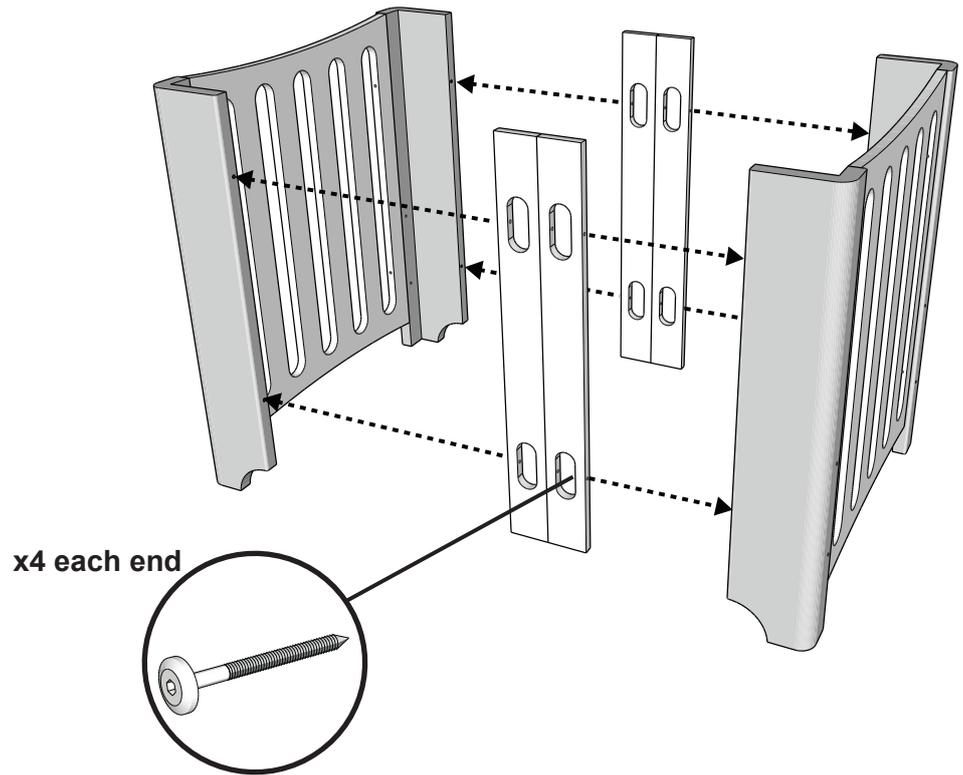

Step 4 - Fit the double ended cap screws

Hardware needed


8 x double ended cap screws



IMPORTANT SAFETY STEP

Fit the double ended cap screws to the 8 remaining unused base locating holes on the side panels. (4 on each side)


This is a required safety step to prevent the entry of small fingers into these holes.

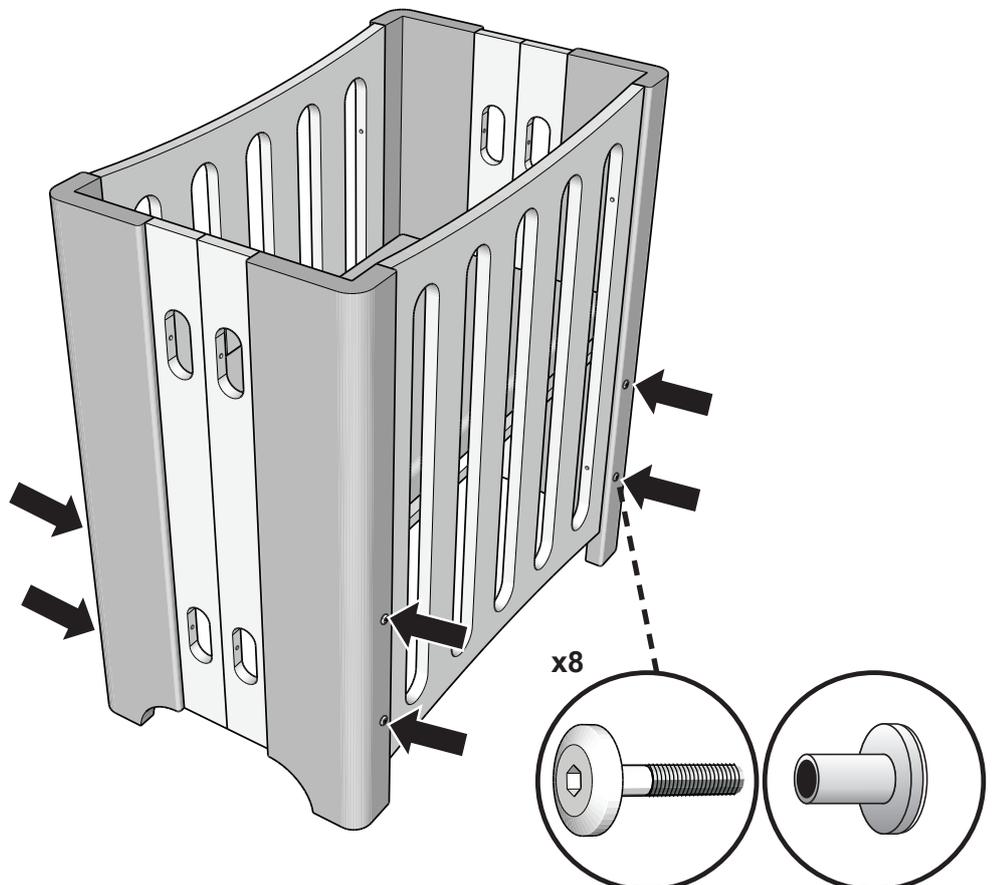


Step 5 - Attach the locating brackets

Hardware needed

4 x Locating brackets



Attach each locating bracket into the hole provided on each corner frame.

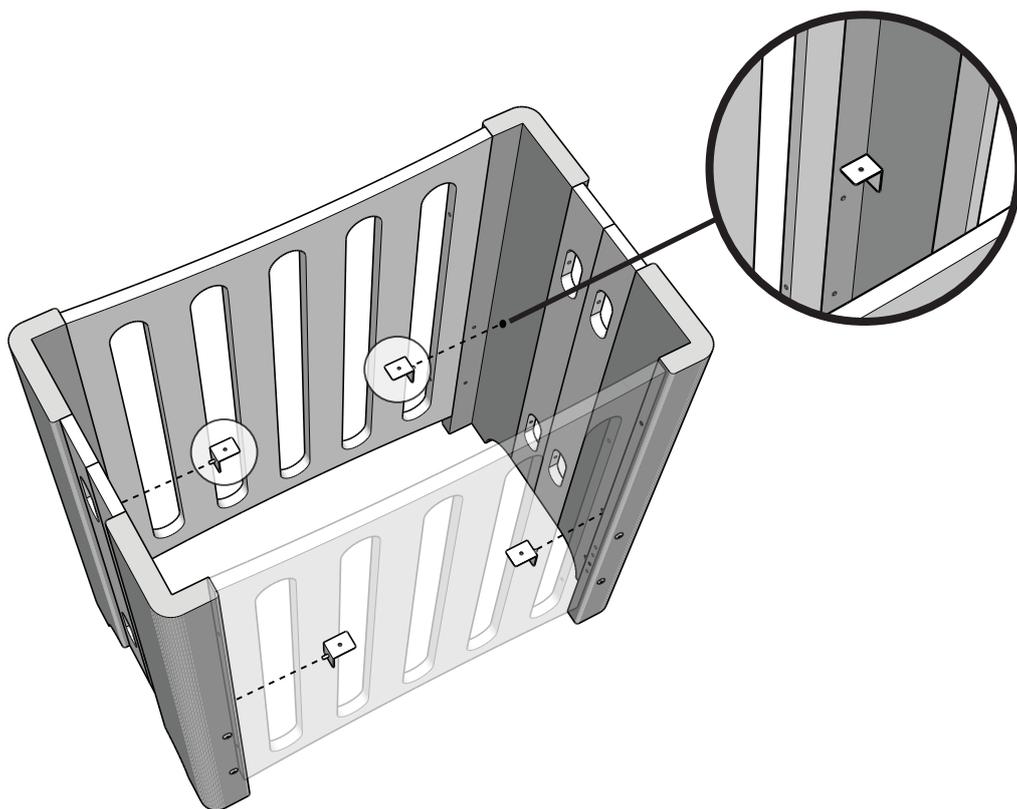

Step 6 - Attach the bassinet base panel



Hardware needed

4 x screws



Position the bassinet base on the locating brackets.


While holding the base in place, gently flip the bassinet onto one side, to gain access to the locating brackets underneath. Secure the base to the locating brackets using the 4 screws supplied. Tighten the screws firmly but do not overtighten.

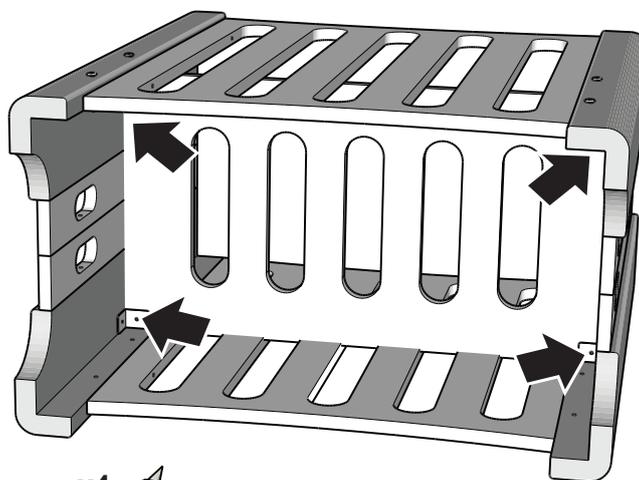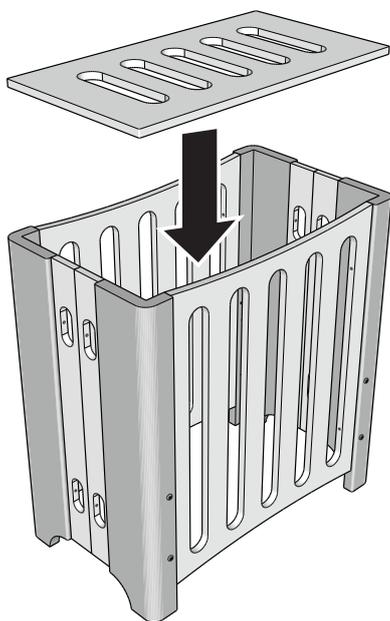

Step 8 - Tighten the screws

Tighten each of the connector screws around the bassinet.

Do not overtighten screws.

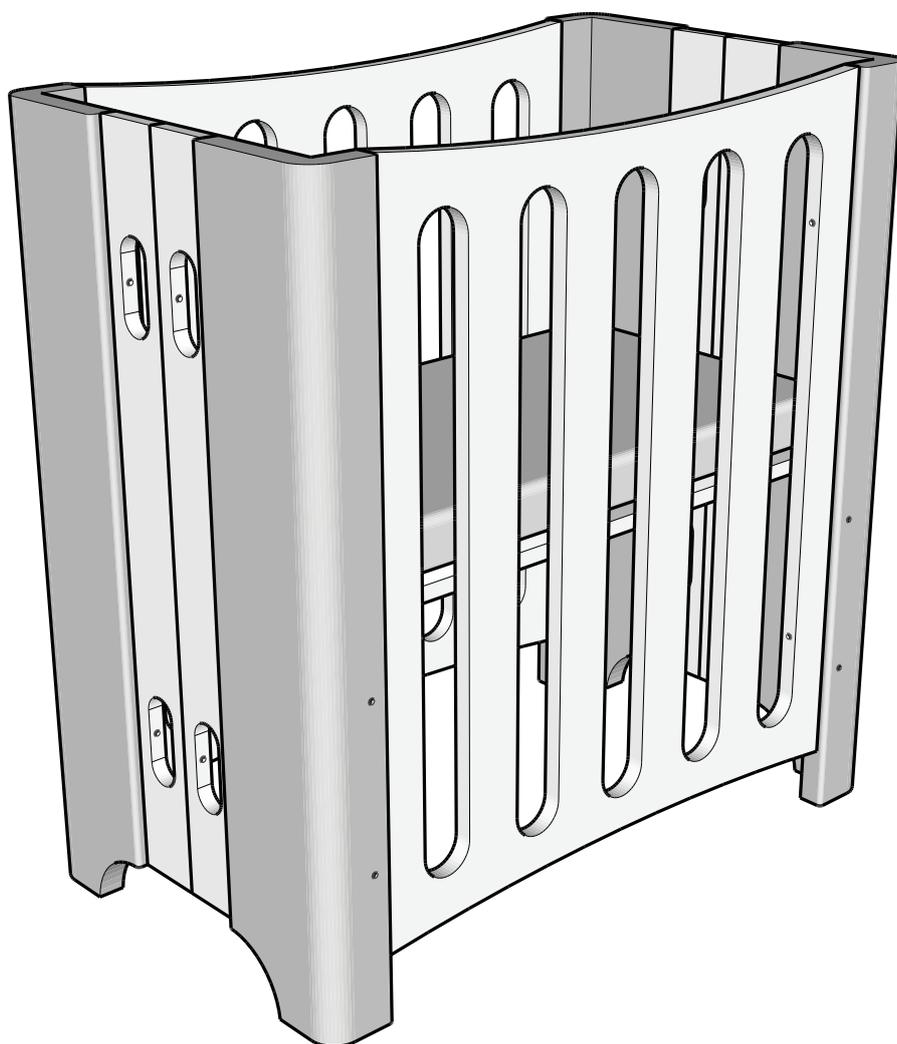

Assembly is now complete

Single Bed - Assembly

Step 1 - Attach the extension panels to the end panels

Hardware needed

8 x 70mm connector screws




8 x end cap screws



Attach the extension panels to the end panels.

Secure each panel using the 60mm connector screws and end cap screws.

Tighten the screws firmly but do not overtighten.

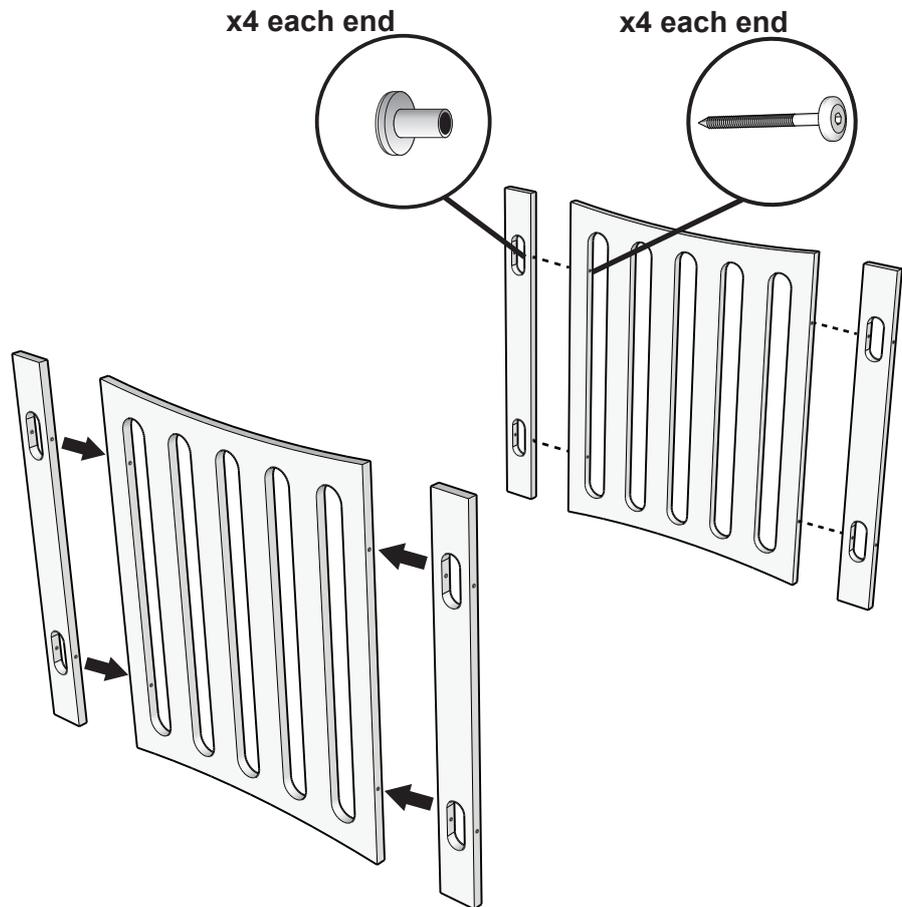

Step 2 - Attach the corner posts to the end panels

Hardware needed


8 x 35mm connector screws



Attach the corner posts to the end panel assemblies. Note how the corner posts are facing.

Secure each post using the 35mm connector screws.

Tighten the screws firmly but do not overtighten.

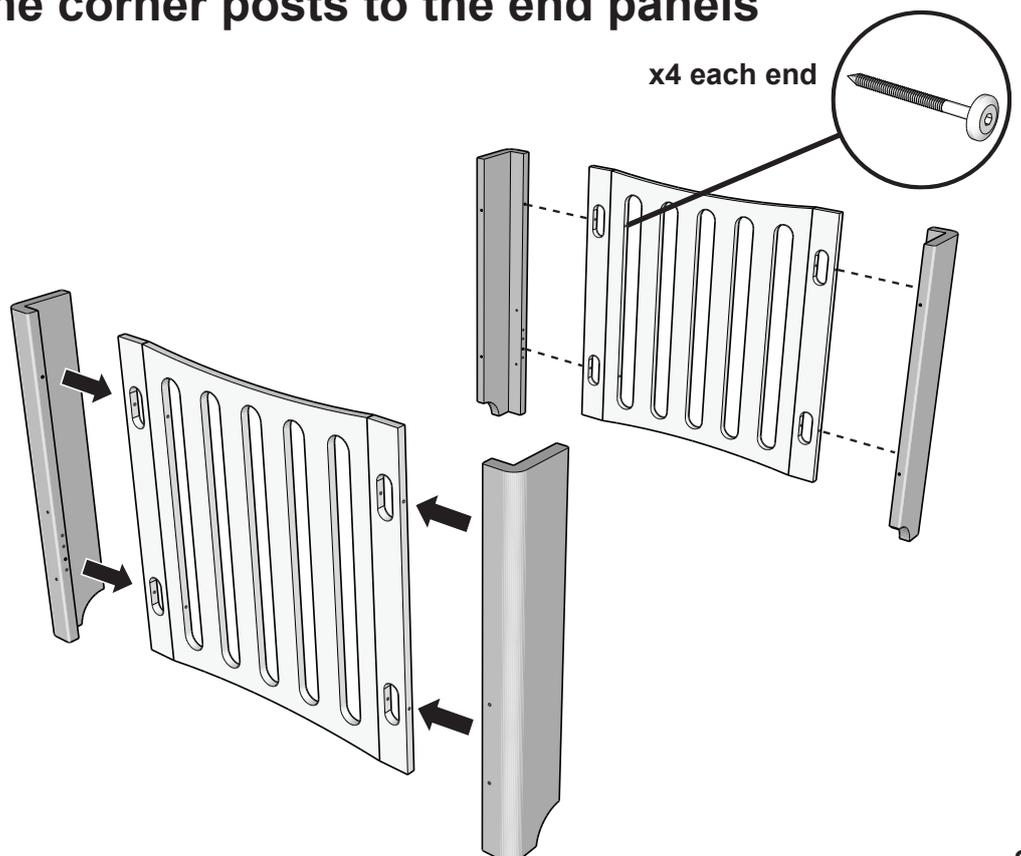


Step 3 - Attach the bed rails to the bed heads

Hardware needed

4 x 35mm connector screws



4 x lunar washers




Temporarily attach the bed rails to the bed heads.

To do this, align the three wooden dowels at the end of the bed rails with the holes on each corner post.

Secure each corner with the lunar washer and connector screw.

Lightly hand tighten all screws at this stage.

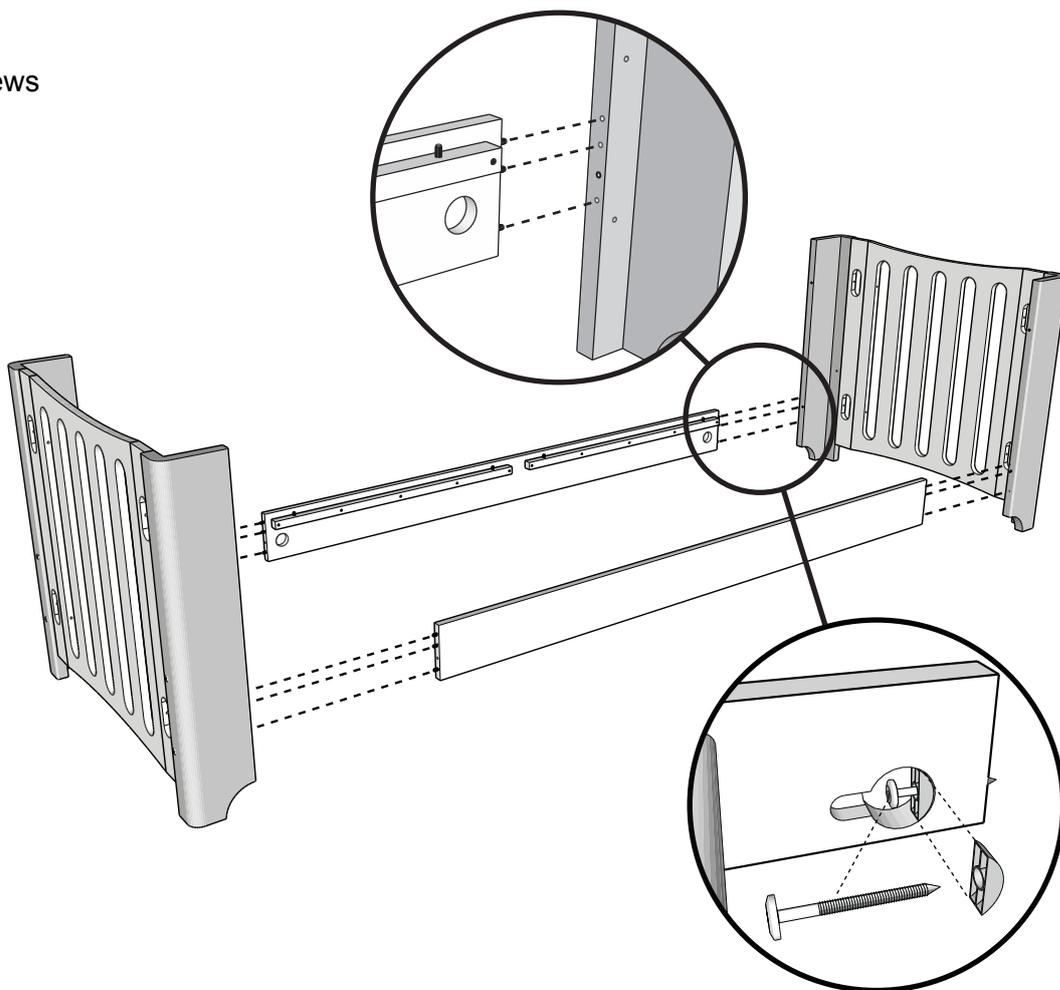

Step 4 - Attach the lattice base frames


Unfurl the lattice base frames.

Note: Do not cut the fabric webbing that holds the slats together.

Fit the lattice base frames between the bed rails. To secure the frames, stretch the first and last slat of the over the corresponding dowel pins.

Stretch the first and last slats of the base frame over the dowel pins.

Do not cut the fabric webbing

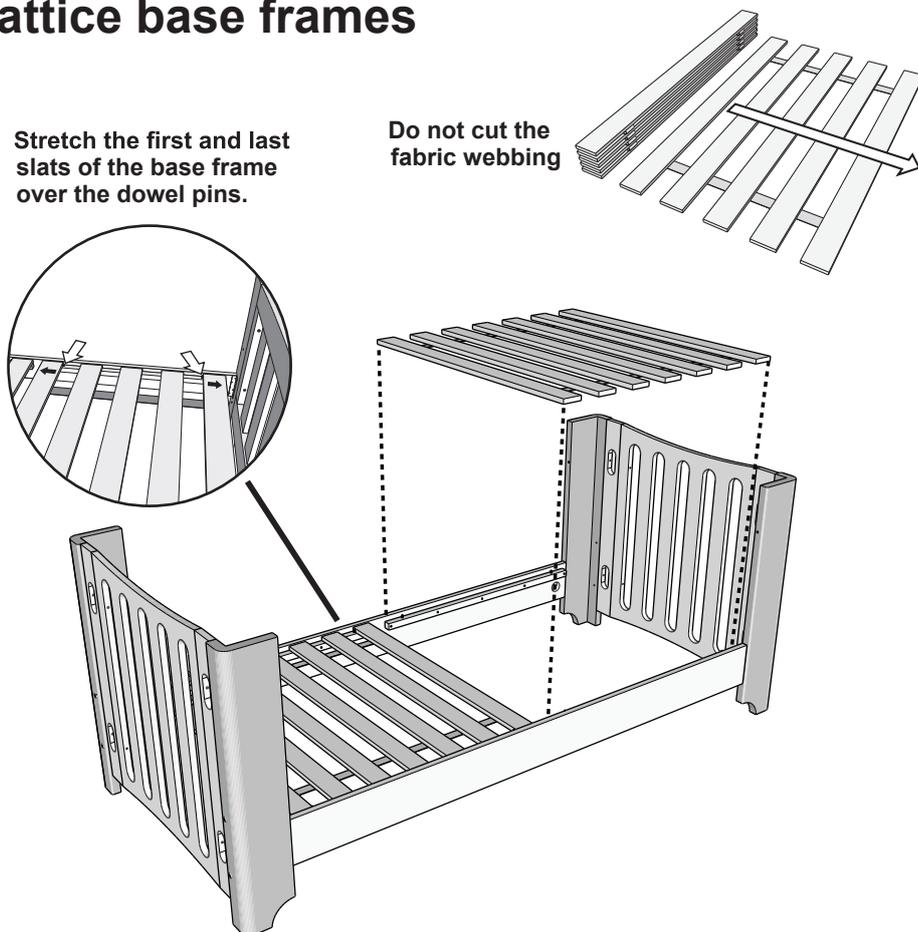

Step 5 - Plug the unused holes

Hardware needed

8 x double ended cap screws




4 x 15mm cap screws



IMPORTANT SAFETY STEP


Fit the small cap screws and double ended cap screws to the remaining unused holes as shown. Repeat for each corner of the bed. This is a required safety step to prevent the entry of small fingers into these holes.

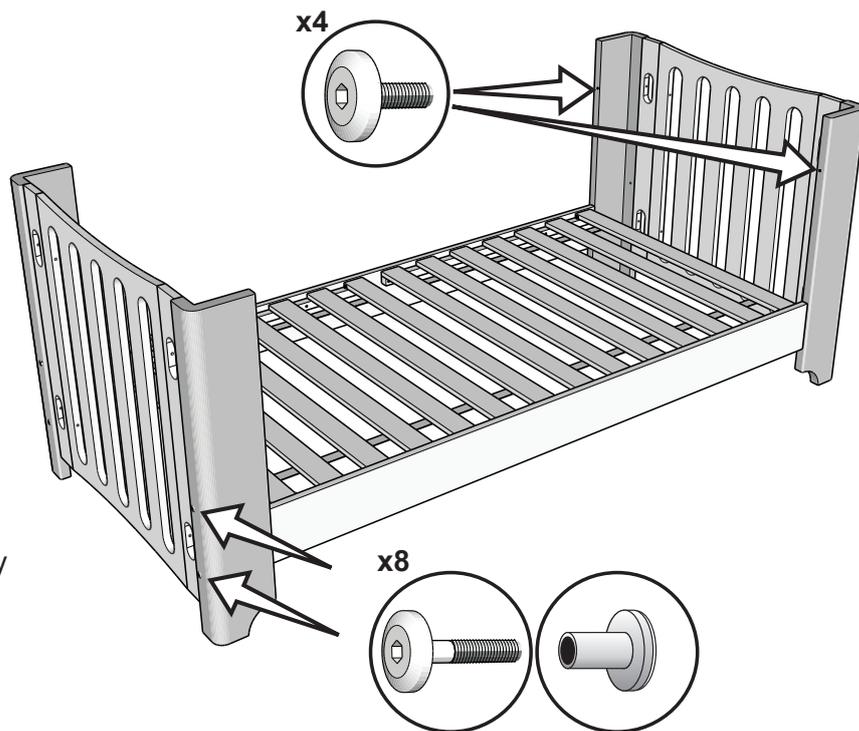

Step 6 - Tighten all connector screws

To complete assembly, tighten all connector screws around the cot.

Tighten the screws firmly but do not overtighten.

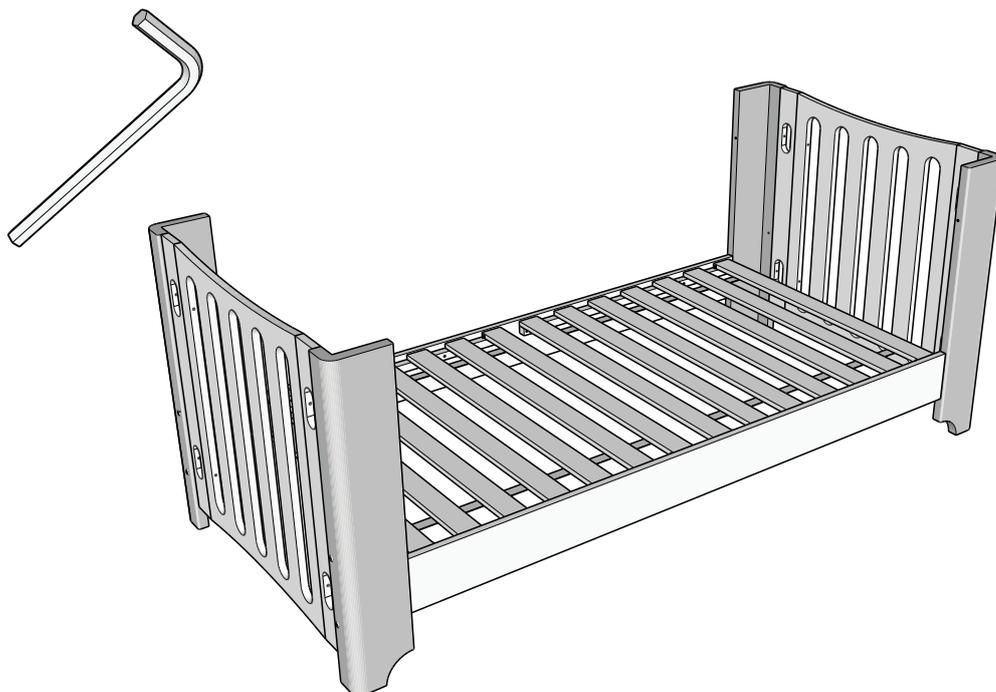


Assembly is now complete

Converting the cot into a junior bed




To prevent damaging the finish of your cot, we recommend these steps are best undertaken by two people.


1. To convert your Tasman Eco cot into a junior bed, begin by loosening the connector screws that hold the base in place. (4 in total)

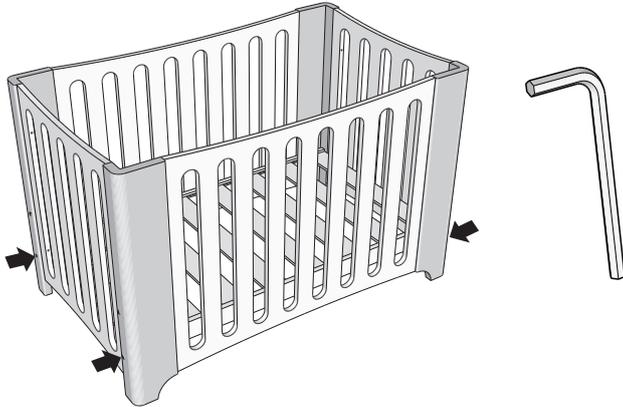


2. Remove the connector screws from the front and rear panels. (8 in total, store these parts in a safe place).

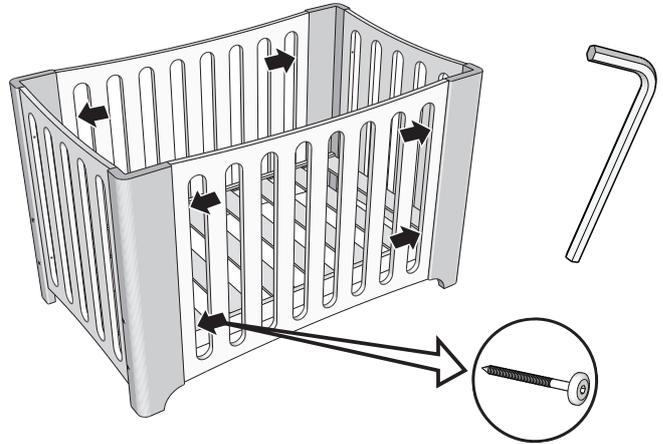


3. Gently spread the side frames apart and carefully remove the front and rear panels.

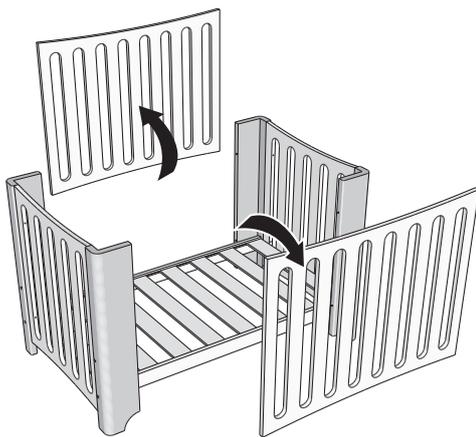


4. Retighten all the connector screws between the bed heads and base. (Do not overtighten).

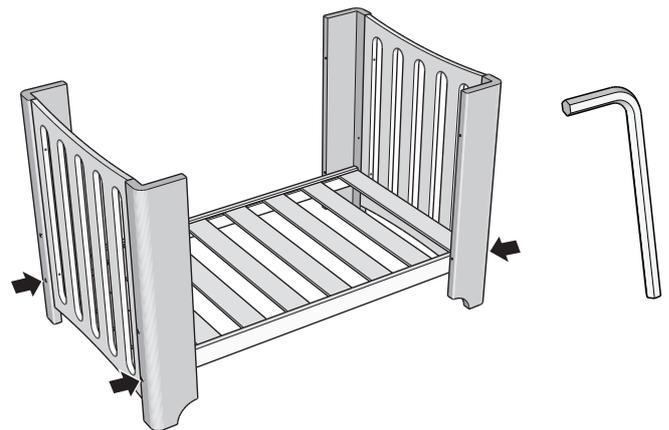

5. Fit the small cap screws to the 8 unused locating holes (4 on each bed head). This is a required safety step to prevent the entry of small fingers into these holes.

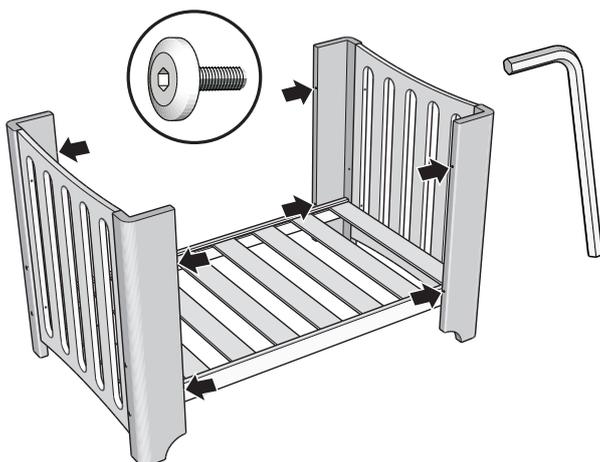

Conversion is now complete

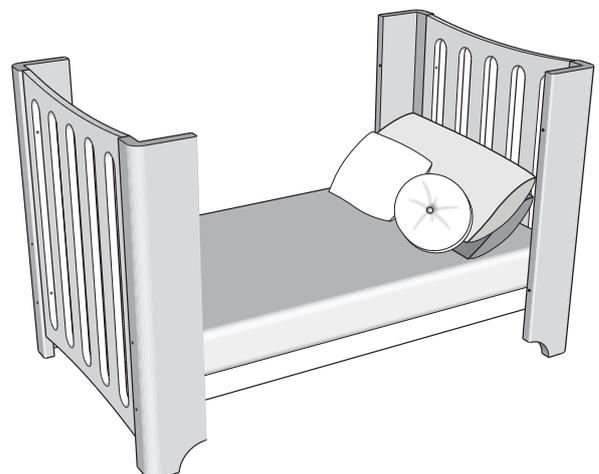


Converting the cot into a chaise lounge




To prevent damaging the finish of your cot, we recommend these steps are best undertaken by two people.

1. To convert your Tasman Eco cot into a chaise lounge, begin by loosening the connector screws around the cot (8 in total).

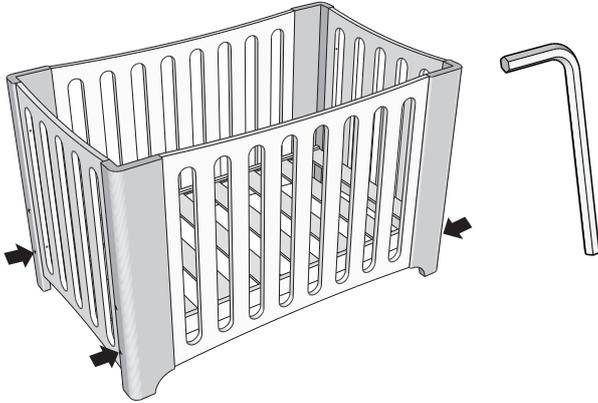


2. Remove the 4 connector screws from the inner front panel. (Store these parts in a safe place).

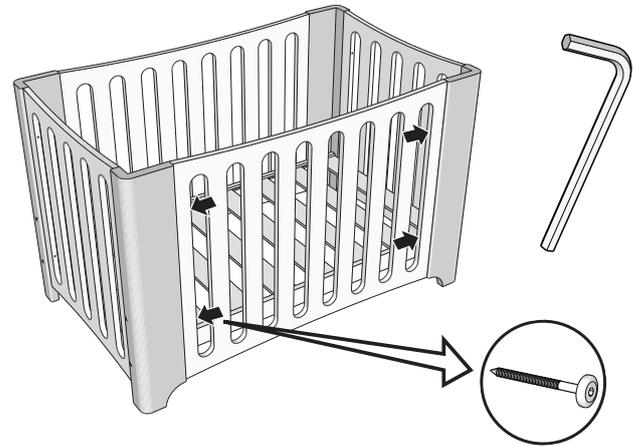


3. Gently spread the side frames apart and carefully remove the inner front panel.



4. Re-tighten all the connector screws between the side frames and base. (Do not overtighten).

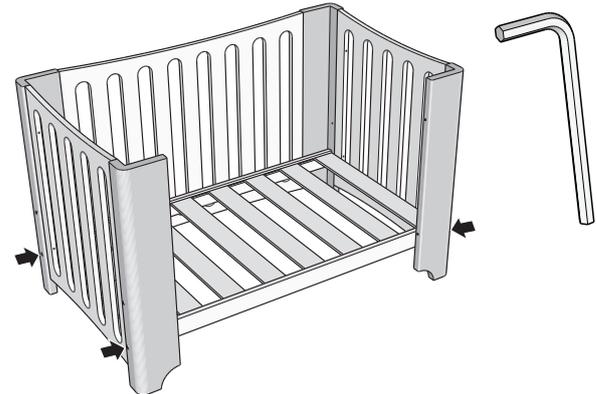


5. Fit the small cap screws to the 4 unused locating holes (2 on each bed head). This is a required safety step to prevent the entry of small fingers into these holes.

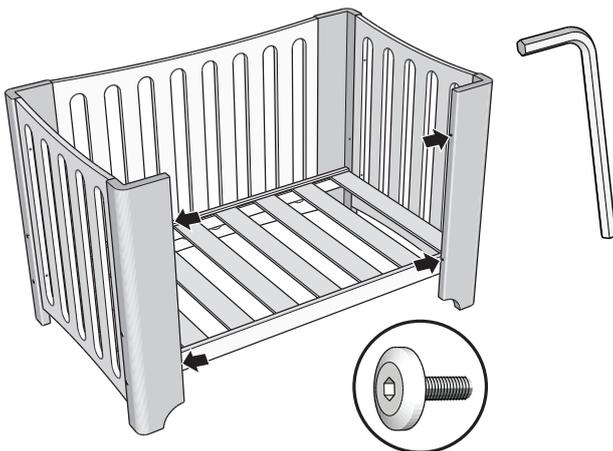

Conversion is now complete

Place a throw rug over the mattress, add a few colourful pillows and your child has their very own chaise lounge where they can read, rest or play.

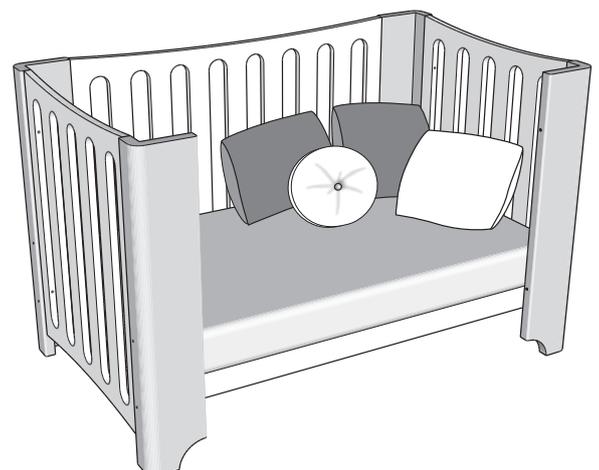

Guarantee & Warranty

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. The guarantee described below is in addition to the guarantee provided by law.

5 YEAR MATERIALS AND WORKMANSHIP GUARANTEE

If within 5 years of the date of purchase of this product, there is found any defect in materials or workmanship of this product, SJC Brands Pty Ltd will replace the product free of charge, subject to the condition below:

The replacement product will be identical to the originally purchase product wherever possible, though in situations where the identical model is discontinued or out of stock, then SJC Brands Pty Ltd will replace the product with a model that is functionally equivalent

This Guarantee is made to the purchaser and/or original owner only. For purposes of this Guarantee, the original owner is considered to be the person who first makes use of the product.

Note: In situations where a person purchases this product for the purpose of gifting to another, the recipient is considered to be the original owner.

CONDITIONS:

The 5 Year Material and Workmanship Guarantee will be void and nullified in circumstances where:

- 1.The item is improperly assembled or adjusted and or not assembled strictly in accordance with the written instructions provided by the seller in the box containing the item.
- 2.There is damage to the product and that damage is deemed by SJC Brands Pty Ltd to be caused by incorrect assembly, misuse or by use or storage outside of the physical or environmental specifications of the product.
- 3.There are modifications to the product or to parts of the product that were not authorized in writing by SJC Brands Pty Ltd.
- 4.The item is transferred, gifted or disposed of by the original owner to another.

WARRANTY CLAIM PROCEDURE:

For warranty claims, please email us via our claims section on our website www.tasmaneco.com.au or visit the store where the product was purchased.

The product must be returned to SJC Brands Pty Ltd or to the place of purchase with proof of purchase, including date and purchase price.

SJC Brands Pty Ltd ABN. 58 106 988 578
4-6 Merryvale Rd , Minto , NSW 2566
PH: 02 9603 5000 FAX: 02 9603 7000
www.tasmaneco.com.au
Email: customer.service@sjcbrands.com.au